


 **SUZUKI**
MARINE
WORLD'S BEST 4-STROKE

DF2.5-DF25

LIGHTWEIGHT MARINE ENGINES

LEAN BURN 

DF15A/20A MODELS

 **SUZUKI**
MARINE
WORLD'S BEST 4-STROKE

These outboards deliver greater fuel efficiency
while the design is lightweight and compact.



the **quiet**
achievers!

DF8A / DF9.9A / DF15A / DF20A / DF25



Greater Ease of Use, Compact with Excellent Acceleration and More Economical Operation

- **World First:** The new compact and lightweight DF15A/20A outboards are also the first in their class to feature a battery-less electronic fuel injection system
- **Packed with Features:** Excellent mid-range torque combined with light-weight results in excellent acceleration
- **Multi-Function Tiller Handle:** This 4-stroke provides greater operating convenience through its innovative multi-function design tiller handle (DF9.9A/DF8A).



DF8A

Maximum Output: 5.9 kW
Cylinders: In-line 2
Displacement: 208 cm³



DF9.9A

Maximum Output: 7.3 kW
Cylinders: In-line 2
Displacement: 208 cm³



DF15A

LEAN BURN

Maximum Output: 11.0 kW
Cylinders: In-line 2
Displacement: 327 cm³

DF20A

LEAN BURN

Maximum Output: 14.7 kW
Cylinders: In-line 2
Displacement: 327 cm³

DF25

Maximum Output: 18.4 kW
Cylinders: V2
Displacement: 538 cm³

world's
first
battery-less
EFI engine
in its class!

 **SUZUKI**
MARINE
WORLD'S BEST 4-STROKE

Compact and lightweight, the DF4, DF5 and DF6 delivers 4-stroke performance and efficiency to portable outboards - the DF2.5 has the lightest weight of any Suzuki.

go
further
for less!

DF2.5 / DF4 / DF5 / DF6

These Compact and Lightweight Suzuki Engines Have Clean Burning, Fuel Efficient Operation

- **Power to Go:** Single cylinder 4-Stroke OHV engine with large displacement for excellent power output and great portability
- **Packed with Features:** Excellent mid-range torque combined with light weight, results in excellent acceleration
- **Easy on Environment:** Suzuki's fuel efficient 4-stroke operation takes you further on a tank of fuel than any other comparable 2-stroke.



DF2.5

Maximum Output: 1.8 kW
Cylinders: 1
Displacement: 68 cm³

the
DF2.5 is the
lightest
SUZUKI
4-stroke ever!



DF6

Maximum Output:
4.4 kW
Cylinders: 1
Displacement:
138 cm³



DF4

Maximum Output:
2.9 kW
Cylinders: 1
Displacement:
138 cm³



DF5

Maximum Output:
3.7 kW
Cylinders: 1
Displacement:
138 cm³

Suzuki technology is right behind you




Quality

Suzuki Anti-Corrosion Finish

Whether it's the sea, lakes or rivers, water is a tough environment. We use our own innovative Anti-Corrosion Finish to guard your Suzuki outboard against the possible effects of corrosion. It's applied directly to the aluminium to provide maximum bonding of the finish to the alloy surface. An epoxy primer undercoat is followed by the black metallic paint and topped off with a clear acrylic resin finish, which together forms a powerful treatment against corrosion.

- Acrylic Resin Clear Topcoat
- Acrylic Resin Black Metallic Basecoat
- Epoxy Primer Undercoat
- Suzuki Anti-Corrosion Finish
- Suzuki Aluminium Alloy



Standards

Cleaner, more efficient operation

Suzuki's advanced four stroke technologies deliver cleaner, more efficient operation that conforms to the Recreational Craft Directive (RCD) Standards and has received a three-star rating from the California Air Resources Board (CARB).



Compliance

All Suzuki marine engines and genuine parts imported and distributed by Haines Suzuki Marine and Suzuki Marine NZ for the Australian and New Zealand markets, comply with all of the import, emissions and communications regulations required by those countries regulators. Please be aware that engines and or parts imported through alternative channels may not meet these regulations, may void your insurance cover and are not supported by local warranties.

Power & Engine Efficiency

Powering our DF4, DF5, and DF6 is a single cylinder four stroke OHV engine with a large displacement of 138 cm³. Its excellent mid-range torque combined with light weight, results in excellent acceleration. Digital Capacitor Discharge Ignition (CDI) offers precise ignition timing and has a built-in rev limiter. The tiller handle is designed to provide a comfortable operating position and more even weight distribution. Other features include F-N-R shifting and 180° steering for great manoeuvrability, a 1.5-litre integral fuel tank and a large carrying handle.

Dynamic features

The DF25 is compact thanks to a 70° V-angle design that also keeps operation smooth with little vibration. Two cylinders, each displacing 269 cm³ (538 cm³ total displacement) utilise two overhead valves per cylinder to deliver maximum power output at 5000 rpm. The V-Twin layout also moves the center of gravity forward which allows for more balance on the transom and makes the engine easier to tilt by hand.



LEAN BURN

Fuel Efficiency

A Series DF15A and DF20A Fuel-Efficient Outboards


Fuel efficiency is increasingly important to boaters, which is why we've created our own Lean Burn Control Technology to maximize the engine efficiency (DF15A/20A). Suzuki four strokes are known for their fuel-efficient operation. Greater fuel efficiency enables these outboards to go further for less.



Suzuki's Tiller Handle

Greater Operating Convenience Through an Intuitive Suzuki Multi-Function design.

Featured on the DF9.9A and DF8A, the Suzuki Function Tiller Handle has been designed by our engineers to provide boaters with greater operating convenience through an intuitive multi-function design. Gearshift, throttle operation and throttle friction adjustment functions are all incorporated into the multi-function handle where they are easy to access and operate without having to remove your hand from the handle.

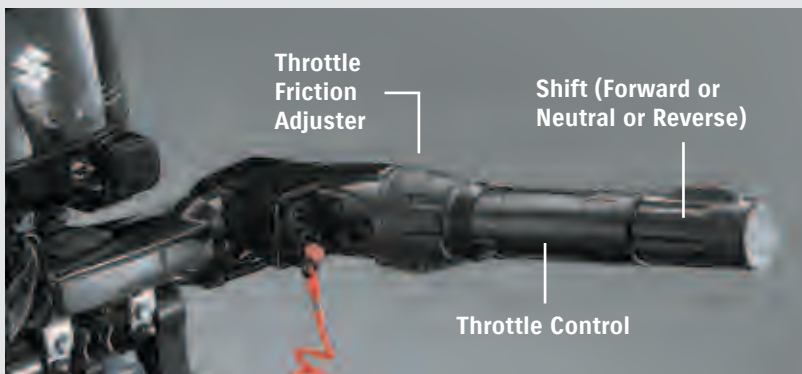

Specifications

MODEL		DF2.5	DF4	DF5	DF6	DF8A	DF9.9A	DF15A	DF20A	DF25
Maximum output kW (PS)		1.8 (2.5)	2.9 (4)	3.7 (5)	4.4 (6)	5.9 (8)	7.3 (9.9)	11.0 (15)	14.7 (20)	18.4 (25)
To suit transom height mm (inch)	S	381mm(15')	381mm(15')	381mm(15')	381mm(15')	381mm(15')	381mm(15')	381mm(15')	381mm(15')	381mm(15')
	L	-	-	-	508mm(20')	508mm(20')	508mm(20')	508mm(20')	508mm(20')	508mm(20')
Dry weight kg	R	-	-	-	-	-	-	S44.0, L45.0	S44.0, L45.0	S 70.0, L 73.0
	MAN	S 13.0	S 25.0	S 25.0	S 25.0, L 26.0	S 39.5, L 42.0	S 39.5, L 42.0	S44.0, L45.0	S44.0, L45.0	S 69.0, L 72.0
	ELEC	-	-	-	-	-	-	S 48.0, L 49.0	S 48.0, L 49.0	S 73.0, L 76.0
Engine type		OHV	OHV	OHV	OHV	OHC	OHC	OHC 4-valve	OHC 4-valve	OHV 4-valve
Cylinders		1	1	1	1	In-Line 2	In-Line 2	In-Line 2	In-Line 2	V2 (70-degree)
Fuel delivery system		Carburetor	Carburetor	Carburetor	Carburetor	Carburetor	Carburetor	Elec Fuel Inj	Elec Fuel Inj	Carburetor
Displacement cm3 (cu. in.)		68 (4.15)	138 (8.4)	138 (8.4)	138 (8.4)	208 (12.7)	208 (12.7)	327 (20.0)	327 (20.0)	538 (32.8)
Bore & stroke	mm	48 x 38	62 x 46	62 x 46	62 x 46	51 x 51	51 x 51	60.4 x 57	60.4 x 57	71 x 68
	inch	1.89 x 1.50	2.44 x 1.81	2.44 x 1.81	2.44 x 1.81	2.0 x 2.0	2.0 x 2.0	2.38 x 2.24	2.38 x 2.24	2.80 x 2.68
Operating range rpm		5250 - 5750	4000 - 5000	4500 - 5500	4750 - 5750	4,700 - 5,700	5,200 - 6,200	5,000 - 6,000	5,300 - 6,300	4700 - 5300
Starting system		Man start/choke	Man start/choke	Man start/choke	Man start/choke	Manual	Manual	Man/Elec start	Man/Elec start	Man/Elec start
Fuel tank capacity litres		Integral 1.0L	Integral 1.5L	Integral 1.5L Rem Connect	Integral 1.5L Rem Connect	Separate 12L	Separate 12L	Separate 12L	Separate 12L	Separate 25L
Oil pan capacity litres.		0.38L	0.7L	0.7L	0.7L	0.8L	0.8L	1.0L	1.0L	1.5L
Ignition system		Pointless	Digital CDI	Digital CDI	Digital CDI	Digital CDI	Digital CDI	Digital CDI	Digital CDI	Digital CDI
Alternator		-	12V6A (op.)	12V6A (op.)	12V6A (op.)	12V6A (op.)	12V6A (op.)	e12V12A/m12V6A	e12V12A/m12V6A	e12V15A/m12V6A
Mounting		Bushing Type	Bushing Type	Bushing Type	Bushing Type	Shear mount	Shear mount	Shear mount	Shear mount	Shear mount
Trim method		Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt	Man Trim & Tilt
Gear ratio		2.15:1	1.92:1	1.92:1	1.92:1	2.08:1	2.08:1	2.08:1	2.08:1	2.09:1
Gear shift		F-N	F-N-R	F-N-R	F-N-R	F-N-R	F-N-R	F-N-R	F-N-R	F-N-R
Exhaust		Above Prop Exh	Above Prop Exh	Above Prop Exh	Above Prop Exh	T/Prop Hub Exh	T/Prop Hub Exh	T/Prop Hub Exh	T/Prop Hub Exh	T/Prop Hub Exh
Drive protection		Shear Pin	Rubber hub	Rubber hub	Rubber hub	Rubber hub	Rubber hub	Rubber hub	Rubber hub	Rubber hub
Propeller selection (pitch)		5 3/8"	6" - 7"	6" - 7"	6" - 7"	7" - 11"	7" - 11"	7" - 11"	7" - 11"	10" - 14"
Steering		Tiller 360° rotat	Tiller 180° rotat	Tiller 180° rotat	Tiller 180° rotat	Tiller	Tiller	Tiller	Tiller	Remote, Tiller

Features

STD ●
OPTIONAL ○

MODEL	DF2.5	DF4	DF5	DF6	DF8A	DF9.9A	DF15A	DF20A	DF25
ELECTRIC START SYSTEM					○	○	○	○	○
MULTI PT SEQUENTIAL ELEC FUEL INJ							●	●	
SUZUKI LEAN BURN CONTROL							●	●	
OVER-REV. LIMITER		●	●	●	●	●	●	●	●
LOW OIL PRESSURE CAUTION					●	●	●	●	●
DIGITAL CDI		●	●	●	●	●	●	●	●
FRESH WATER FLUSHING SYSTEM		●	●	●	●	●	●	●	●
REMOTE CONTROL		○	○	○	○	○	○	○	○
TILLER HANDLE	●	●	●	●	●	●	●	●	●
SHALLOW WATER DRIVE		●	●	●	●	●	●	●	●
SUZUKI ANTI-CORROSION SYSTEM	●	●	●	●	●	●	●	●	●
POWER TILT (Available Winter 2013)							○	○	

Due to the many variables of model combinations, see your Suzuki dealer.



Way of Life!

Suzuki Genuine Rigging Parts and Accessories

Quality. Dependability. Innovation. Everything that you expect from your outboard motors is delivered with style by Suzuki. Demand no less from the products that you choose to enhance your total boating pleasure. Demand GENUINE SUZUKI ACCESSORIES. Our commitment to you is to provide you with the finest products available. From our classic line of matching instruments and gauges to our custom-engineered propellers and rigging items, you can depend on GENUINE SUZUKI ACCESSORIES for optimum performance. Take a few minutes to talk to your nearest authorised Suzuki dealer for the right type of accessories to suit your boating needs.

- Suzuki Modular Instrument Systems
- Analogue Instruments
- Control Systems
- Steering Components
- Electrical Parts
- Fuel System Components
- Props
- Care and Maintenance Items



DISCLAIMER: The Haines Group Pty Ltd reserves the right to modify the information contained in this brochure at any time without notice and, subject only to any statutory obligations, provides the information in this brochure "as is" without warranty of any kind. While The Haines Group Pty Ltd makes all reasonable efforts to ensure that all material in this brochure is correct, it may contain technical or typographical errors, and therefore The Haines Group Pty Ltd does not assume any responsibility for the accuracy or authenticity of any information contained in this brochure.



3 YEAR WARRANTY

LEAN BURN

DF15A/20A

AUSTRALIA CALL
1300 300 550
suzukimarine.com.au

NEW ZEALAND (FREECALL)
0508 68826273
(0508 OUTBOARD)
suzukimarine.co.nz

 **SUZUKI**
MARINE
WORLD'S BEST 4-STROKE